



PURCHASING SECTION
13450 – 104 Avenue, Surrey BC V3T 1V8
Tel: 604-590-7274
E-mail: purchasing@surrey.ca
ADDENDUM #2

REQUEST FOR PROPOSALS (RFP) NO.:	1220-030-2017-025
TITLE:	SUPPLY, DELIVERY AND INSTALLATION OF ARTIFICIAL TURF – CLOVERDALE ATHLETIC PARK
ADDENDUM ISSUE DATE:	May 11, 2017
CLOSING TIME:	on or before the following date and time: May 12, 2017, 3:00 p.m., local time

INFORMATION FOR PROPONENTS

This Addendum is issued to provide additional information to the RFP for the above named project, to the extent referenced and shall become a part thereof. No consideration will be allowed for extras due to the Proponent not being familiar with this Addendum. This Addendum No. 2 contains two (2) pages in total.


QUESTIONS AND ANSWERS:

Q1: In Schedule A, item 1 General requirements, the scope of work for field #1, last item of the list is asking for the replacement of the existing football goal post. You have provided the expected model you want the bidder to work with in addendum 1. In appendix A.1 Performance specifications, page A.1-1, item 1.1.6. we are reading: "Remove the existing football goals and supply and install new football goals including foundations". We don't see any details in the drawings in regards of the expected goal post foundation. Question: is the foundation to be removed and replaced? If so, can you provide details on the foundation to build?

A1: The existing foundation is to be removed and replaced. Refer to the attached details on the foundation to build for the replacement of the existing football goal post.

END OF ADDENDUM #2


All Addenda will become part of the RFP Documents.

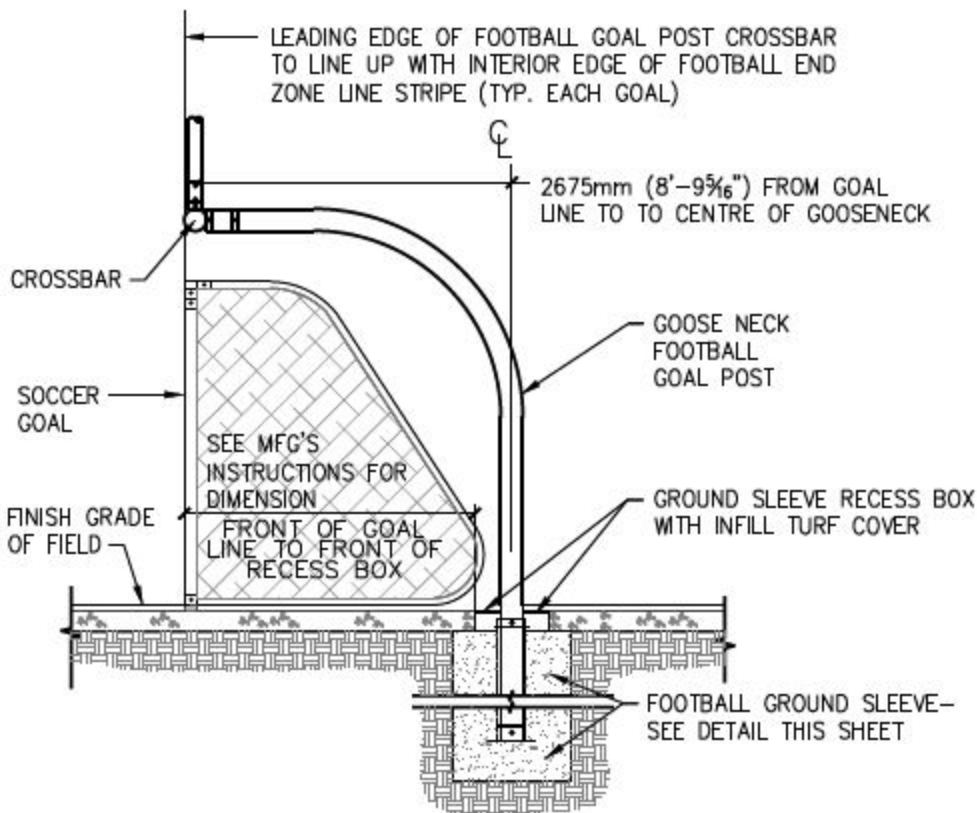

FOOTBALL AND SOCCER GOAL LOCATION DETAIL

N.T.S.

NOTE:
GOAL POST MOUNTING DETAIL MAY VARY ACCORDING
TO MANUFACTURERS' INSTALLATION INSTRUCTIONS.

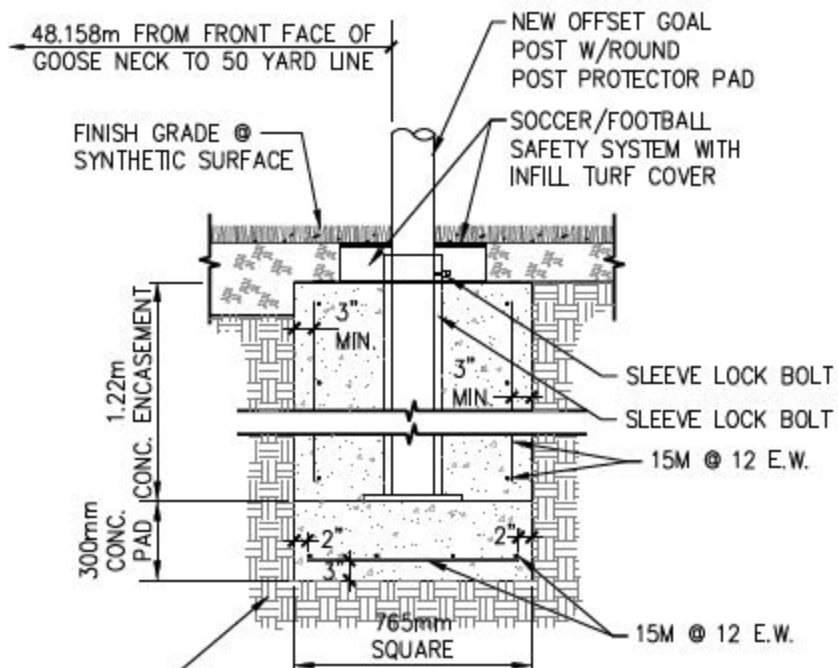

SUITABLE APPROVED NON-ORGANIC SUBGRADE COMPACTED TO 95% MPD. EXCAVATION OF ORGANIC/UNSUITABLE MATERIAL & BACKFILLING WITH IMPORTED GRANULAR FILL OR APPROVED NON-ORGANIC EXCAVATED MATERIAL WILL BE REQUIRED.
(REFER TO GEOTECHNICAL REPORT FOR DETAILS)

GOAL POST MOUNTING DETAIL

N.T.S.